
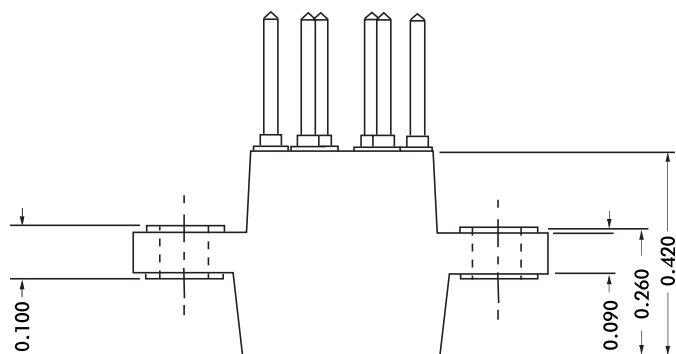
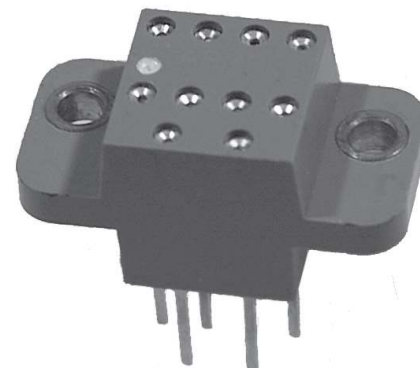


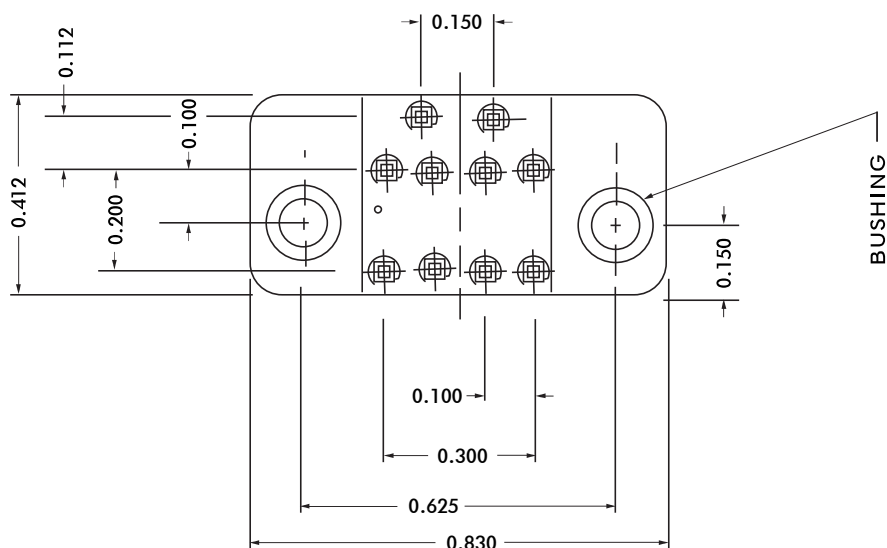

ELECTRICAL

Contact Rating 3 Amperes

Withstanding Voltage:

Contact to Contact Sea Level. . . 1000 VRMS Minimum

Contact to Ground Sea Level. . . 1800 VRMS Minimum

Contact to Contact 70,000 Ft. . . 300 VRMS Minimum

Contact to Ground 70,000 Ft. . . 450 VRMS Minimum

MECHANICAL

Creepage Between Contacts 0.02 Minimum

Air Space Between Contacts 0.02 Minimum

Contacts to Accept 0.020 ± 0.001 DIA. Pins

Contacts:

Heat Treated Beryllium Copper

Gold Plated over Copper or Nickel Plate

Mounting Hardware:

Threaded or Clearance Hole Mounting Bushings


Insulation Material:


Choice of "MIL Approved" Thermosetting

Insulations (See Page 45)

Temperature Ratings: -65°C to +125°C

Weight of Socket with Mountings: 0.15 oz.

CONTACT DATA		CHASSIS MOUNTING DATA			
		X-DIMENSION	CLEARANCE HOLE FOR NO.2 SCREW	NO.2 -56 THREAD	
OPEN ENTRY		SOLDER CUP			
		EYELET			
		STRAIGHT			
CLOSED ENTRY		WIRE WRAP	.24	HAND-13KLT3	HAND-518KLT3
		EYELET			
		STRAIGHT			

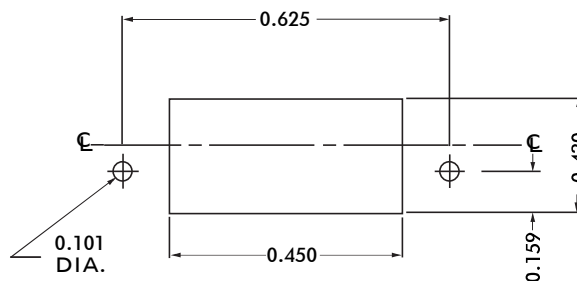

RECOMMENDED CHASSIS CUT-OUT