

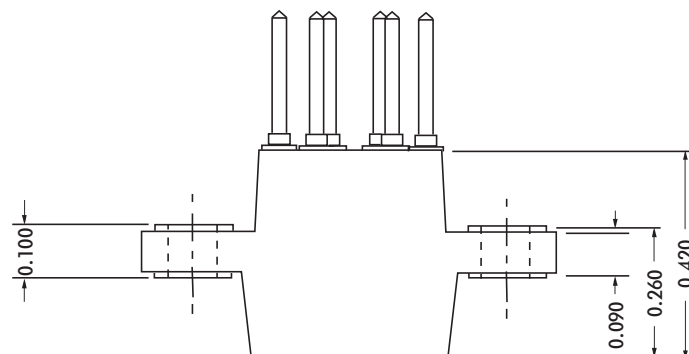
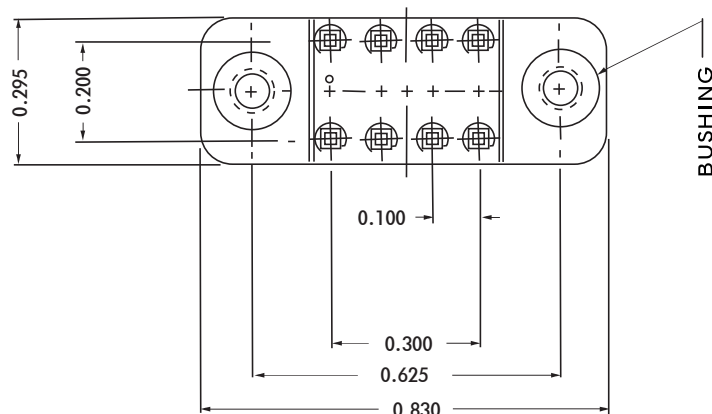


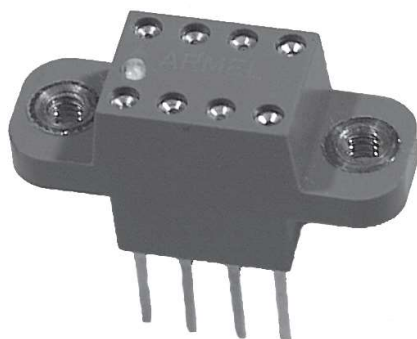

CONTACT DATA		CHASSIS MOUNTING DATA	
		X-DIMENSION	NO.2-56 THREAD
OPEN ENTRY	 3/16		
	 1/4		
	 3/16		
	 0.025 SQ.		
CLOSE ENTRY	 0.025 SQ.	.24	HAN-13KLT3
	 1/4		
	 1/8		
	 1/8		

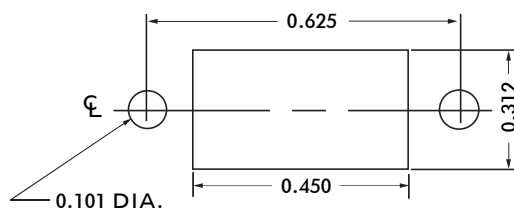

RECOMMENDED CHASSIS CUT-OUT

ELECTRICAL

Contact Rating 3 Amperes

Withstanding Voltage:

Contact to Contact Sea Level. . . 1000 VRMS Minimum
 Contact to Ground Sea Level. . . 1800 VRMS Minimum
 Contact to Contact 70,000 Ft. . . . 300 VRMS Minimum
 Contact to Ground 70,000 Ft. . . . 450 VRMS Minimum

MECHANICAL

Creepage Between Contacts 0.02 Minimum

Air Space Between Contacts 0.02 Minimum

Contacts to Accept 0.020 ± 0.001 DIA. Pins

Contacts:

Heat Treated Beryllium Copper
 Gold Plated over Copper or Nickel Plate

Mounting Hardware:

Threaded or Clearance Hole Mounting Bushings

Insulation Material:

Choice of "MIL Approved" Thermosetting
 Insulations (See Page 45)

Temperature Ratings: -65°C to +125°C

Weight of Socket with Mountings: 0.10 oz.